

BONDFIXER
CHEMICAL INDUSTRIES



Build with
EXPERIENCE...

TILE ADHESIVE
EPOXY GROUT

www.bondfixer.com



BONDFIXER

COMPANY STORY

We are serving top grade quality material for better installation with better service

BONDFIXER chemical Industries company is considered as one of the leading supplier of construction chemical product in india. BONDFIXER construction chemical company is an iso 9001-2015 certified company. bondfixer is fastest growing indian company in the field of construction chemical with the brand name of BONDFIXER. our product range of construction chemical such as epoxy and grout, adhesives, admixtures, sealers and other for various application like grouting, fixing of tiles, waterproofing etc.

The Same is reflected in our end product which is of international standard AN ISO 9001:2015/: Assist people achieve their objectives & in return you will achieve yours," BONDFIXER management believes that our success lies in the success of our business partners.



www.bondfixer.in



TILE GROUT

Polymer Modified Grout
For Wall & Floor Tile Joints.



Technical Information :

PROPERTIES	RESULTS
Pot life @ 30°C, minutes	60
Open Time, Minutes 30	30
Adjustability, Minutes	15-20
Initial Set @ R T, Hours	2
Final Set @ R T, Hours	8
Shrinkage, %	<0.1
# Water Absorption, %	8.3

PRODUCT DETAILS :

A high quality fine polymer modified water resistant cement based powder grout, suitable for floor tile and wall tile joints. Up to 3 mm

FEATURES :

Polymer modified grout
Good Compressive strength
Available in range of colors
Easy to use
Non shrink
Durable
Abrasion Resistance


PACKAGING :

500gm, 1 kg. & 10 kg.

COVERAGE :

Varies with tile size and grout width

AVAILABLE COLOUR :

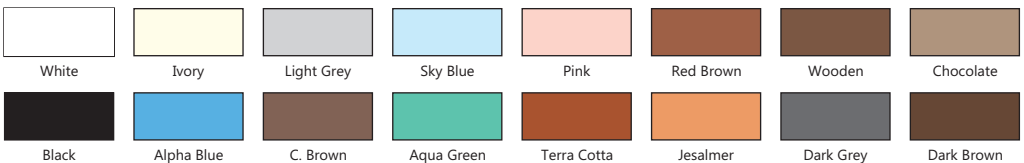

GROUT HARDENER

Use For Hard Bonding Of Grout,
With All Type Of Grouts.



PRODUCT DETAILS :

GROUT HARDENER is specially designed grout hardener, to be used sanded and unsanded grout. it improves the performance of cement grouts for all type of ceramic tiles, brick, marble, natural stone installations.

FEATURES :

- Polymer additive for cement polymer grouts, super grouts & Wide joint grouts
- Improves the flexibility for cement polymer grouts, super grouts & wide joint grouts
- Improve the strength
- Increase the abrasion resistance grouts

PACKAING :


250 ml, 500ml & 1 Ltr.

Technical Information :

PROPERTIES	RESULTS
Physical Appearance	White Liquid
Specific Gravity	0.955
Solid Contain	20.5%
Odour	Medium

EPOXY GROUT JOINT FILLER (2 PART)

Easy To Apply & Clean

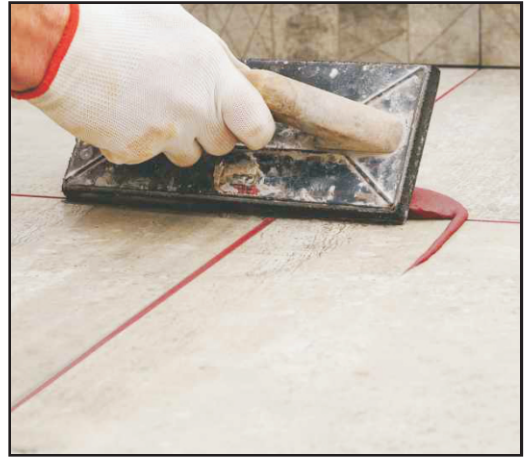

Technical Information :

PROPERTIES	RESULTS
Shear Adhesion Strength	>2N/m ²
Abrasion Resistance	=250mm ³
Mechanical Flexural Strength	= 30 N/mm ²
Compressive Strength	=45 N/mm ²
Water Absorption	Nil (1)

Tensile Adhesion (14 Day Air)

Epoxy Grout	>4.5 Dry Condition (kN)
Epoxy Grout	>3.6 Wet Condition (kN)

PRODUCT DETAILS :

A high quality fine polymer modified water resistant cement based powder grout, suitable for floor tile and wall tile joints. Up to 3 mm

FEATURES :

Stain free
Easy to install and clean
Non-creasing or powdering
Anti-Bacterial and Anti -Fungal
Waterproof & durable joints
Chemical & Temperature Resistance

PACKAING :

1 kg. & 5 kg.

COVERAGE :

Varies with tile size and grout width

Use For Hard Bonding Of Grout,
With All Type Of Grouts.



Technical Information :

PROPERTIES	RESULTS
Shear Adhesion Strength	>2N/m ²
Abrasion Resistance	=250mm ³
Mechanical Flexural Strength	= 30 N/mm ²
Compressive Strength	=45 N/mm ²
Water Absorption	Nil (1)

Tensile Adhesion (14 Day Air)

Epoxy Grout	>4.5 Dry Condition (kN)
Epoxy Grout	>3.6 Wet Condition (kN)

PRODUCT DETAILS :

3 Part of Epoxy Grout is a three-part system, comprising of PART A, PART B and PART C for ease of application, The ability to fill tile stone joints. The grout is best mixed to a smooth, creamy consistent paste. Epoxy resin based grout has a high degree of resistant to chemicals, abrasion and higher impact resistance. The cured grout-creates-tough, impermeable layer-resistant to food drops, bacteria, and dirt is easily maintained in a spiral condition.

FEATURES :

- Stain less and easy to clean, easy to mix and apply.
- Provides excellent chemical resistant property.
- Provides hygienic, hard wearing & impervious properties.
- Non-cracking or powdering.
- Non-Toxic & restricts entry of bacteria / dirt.

PACKAING :

1 kg & 5 kg



Technical Information :

PROPERTIES	RESULTS
Appearance	Free Flowing Powder
Colour	Grey
Pot Life	3 Hours
Open Time	20 Min.
Adjustability Time	10 Min.
Trafficable Time, Hrs	24
Shear Adhesion, Dry Condition (As Per Annex B)	1.09 N/mm ²
Tensile Adhesion, Dry Condition (As Per Annex A)	1.0 N/mm ²
EN 12004 Standards	C1E

PRODUCT DETAILS :

SILVER high polymer modified cement based tile adhesive, Suitable for fixing small wall and floor tiles in internal situation. Application in difficult and demanding situations consult BONDFIXER regarding use of a higher performance adhesive.

FEATURES :

- Suitable for fixing ceramic tiles for wall & floor
- Polymer modified adhesive
- Good strength & interior situations
- Easy mixing & application

PACKAING :

20 kg

COVERAGE :

Approximately 4.5 to 5m/20kg @ 3mm thickness when using a thin trowel
SILVER Interior Wall & Floor Tile Adhesive

Interior Wall & Floor Tile,
Window Framing, Tile On Tile



Technical Information :

PROPERTIES	RESULTS
Appearance	Free Flowing Powder
Colour	Grey
Pot Life	3 Hours
Open Time	20 Min.
Adjustability Time	10 Min.
Trafficable Time, Hrs	24
Shear Adhesion, (As Per Annex B) Dry Condition Heat Condition Wet Condition	>1.22 N/mm ² >1.10 N/mm ² >1.00 N/mm ²
Tensile Adhesion, (As Per Annex A) Dry Condition Wet Condition	>1.10 N/mm ² >1.00 N/mm ²
EN 12004 Standards	C2T

PRODUCT DETAILS :

GOLD high polymer modified cement based tile adhesive, Suitable for fixing wall tile, floor tile, vitrified tiles, porcelain tiles 600x600,800x800, 600x1200 and also tile on tile in internal situation. Applications in difficult and demanding situation consult BONDFIXER regarding use of a higher performance adhesive

FEATURES :

- High polymer modified adhesive
- Easy mixing & smooth application & better work ability
- High strength* For use on walls and floors interior & exterior

PACKAING :

20 kg



Technical Information :

PROPERTIES	RESULTS
Appearance	Free Flowing Powder
Colour	White
Pot Life	3 Hours
Open Time	20 Min.
Adjustability Time	10 Min.
Trafficable Time, Hrs	24
Shear Adhesion, (As Per Annex B) Dry Condition Heat Condition Wet Condition	>1.50 N/mm ² >1.20 N/mm ² >1.10 N/mm ²
Tensile Adhesion, (As Per Annex A) Dry Condition Wet Condition	>1.40 N/mm ² >1.10 N/mm ²
EN 12004 Standards	C2TE

PRODUCT DETAILS :

DIAMOND high polymer modified cement based tile adhesive. suitable for fixing wall tiles, floor tiles, vitrified tiles, porcelain tiles, 600x1200, 800x1600, 1000x1000 applications in difficult and demanding situation consult BONDIFIXER regarding use of a higher performance adhesive

FEATURES :

- High polymer modified adhesive
- For use on walls & floors in Interior & exteriors
- Easy mixing & smooth application & better work ability
- High strength & Water resistance
- Diamond meets the performance requirements of


PACKAING :

20 kg

COVERAGE :

Approximately 4.5 to 5m/20kg @ 3mm thickness when using a thin trowel

For Consistent And
Even Spacing Of Tiles

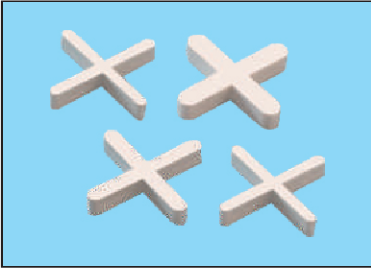

ADVANTAGES :

At the most basic level, spacers have a pretty simple purpose: they will allow you to keep the tiles at equal distance, enabling you to space them correctly and get a symmetrical result. However, their benefits don't stop there.

METHOD OF APPLICATION :

if you plan to undertake tile installations at home, be sure to obtain some tile spacers for your project. Spacers are small cross-like or T-shaped pieces of plastic, ceramic or wood which help you to space your tiles apart in equal distance. They come in various sizes, although most commonly used spacers range in width from 1/4 to 3/8 of an inch. To use spacers, you need to lay 4 tiles at a time on the work surface. You place the spacers at the corners of each tile and then push the tiles together until they can go no further. Once you complete your tile installation, you can remove the spacers and save them for a future project. Spacers can help you to accomplish a well installed and attractive tile arrangement on floors, walls or countertops in your home.

AVAILABLE SIZE :

2mm, 3mm, 4mm, 5mm, 6mm, 8mm, 10mm

PACKING :

100 Nos-Per Packet TILES SPACER For consistent and even spacing of tiles.



APPLICATION AREAS :

Walls, Floors, Interiors, Exteriors,
Dry & Wet Areas, Showers, Swimming Pools

**Available In Two Sizes
Small & Large**


PACK SIZE :

SMALL SIZE :

50 (Clip) + 50 (Wedge)

BIG SIZE :


Available 100 Clip & 100 Wedge Differently
Clips Available In : 1.5, 2, 3 & 4mm.

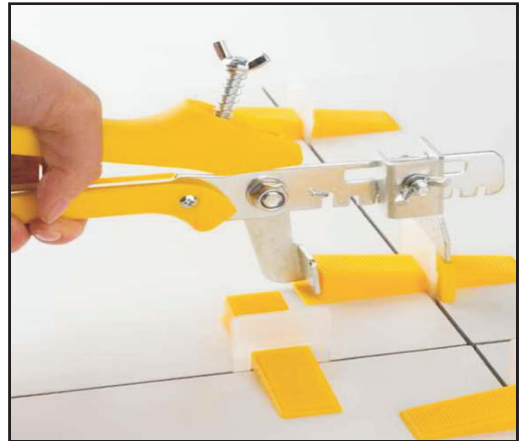

SIZE / AREA	1m ²	2m ²	5m ²	10m ²	20m ²	50m ²
30x30 cm	12	24	60	120	240	600
40x40 cm	25	50	125	250	500	1250
50x50 cm	15	30	75	150	300	750
30x60 cm	18	36	90	180	360	900
60x60 cm	12	20	50	100	200	500
80x80 cm	10	20	45	80	140	360

BONDFIXER

CHEMICAL INDUSTRIES

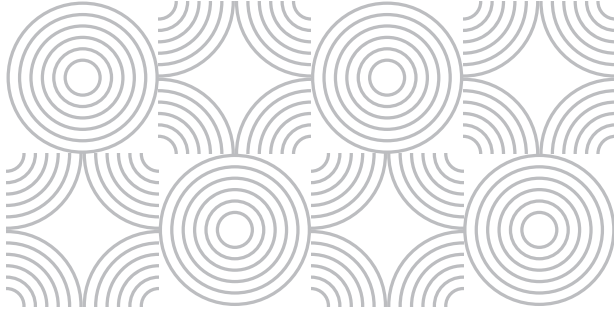


BONDFIXER CHEMICAL INDUSTRIES

Opp. City Art Mall, Pipli Jetpar Road,
Pipli Village, Morbi - 363642.

 www.bondfixer.in

 bondfixer2024@gmail.com

 +91 74051 09057

 +91 72280 42024

